

# Build Your Own Clone Full Circle Bass Fuzz Kit Instructions



## Warranty:

BYOC, Inc. guarantees that your kit will be complete and that all parts and components will arrive as described, functioning and free of defect. Soldering, clipping, cutting, stripping, or using any of the components in any way voids this guarantee. BYOC, Inc. guarantees that the instructions for your kit will be free of any major errors that would cause you to permanently damage any components in your kit, but does not guarantee that the instructions will be free of typos or minor errors. BYOC, Inc. does not warranty the completed pedal as a whole functioning unit, nor do we warranty any of the individual parts once they have been used. If you have a component that is used, but feel it was defective prior to you using it, we reserve the right to determine whether or not the component was faulty upon arrival. Please direct all warranty issues to: [sales@buildyourownclone.com](mailto:sales@buildyourownclone.com) This would include any missing parts issues.

## Return:

BYOC, Inc. accepts returns and exchanges on all products for any reason, as long as they are unused. We do not accept partial kit returns. Returns and exchanges are for the full purchase price less the cost of shipping and/or any promotional pricing. Return shipping is the customer's responsibility. This responsibility not only includes the cost of shipping, but accountability of deliver as well. Please contact [sales@buildyourownclone.com](mailto:sales@buildyourownclone.com) to receive a return authorization before mailing.

## **Tech Support:**

BYOC, Inc. makes no promises or guarantees that you will successfully complete your kit in a satisfactory manor. Nor does BYOC, Inc. promise or guarantee that you will receive any technical support. Purchasing a product from BYOC, Inc. does not entitle you to any amount of technical support. BYOC, Inc. does not promise or guarantee that any technical support you may receive will be able to resolve any or all issues you may be experiencing.

That being said, we will do our best to help you as much as we can. Our philosophy at BYOC is that we will help you only as much as you are willing to help yourself. We have a wonderful and friendly DIY discussion forum with an entire section devoted to the technical support and modifications of BYOC kits.

[www.byoelectronics.com/board](http://www.byoelectronics.com/board)

When posting a tech support thread on the BYOC forum, please post it in the correct lounge, and please title your thread appropriately. If everyone titles their threads "HELP!" then it makes it impossible for the people who are helping you to keep track of your progress. A very brief description of your specific problem will do. It will also make it easier to see if someone else is having or has had the same problem as you. The question you are about to ask may already be answered. Here is a list of things that you should include in the body of your tech support thread:

1. A detailed explanation of what the problem is. (more than, "It doesn't work, help")
2. Pic of the topside of your PCB.
3. Pic of the underside of your PCB.
4. Pic that clearly shows your footswitch/jack wiring and the wires going to the PCB
5. A pic that clearly shows your wiring going from the PCB to the pots and any other switches(only if your kit has non-PC mounted pots and switches)
6. Is bypass working?
7. Does the LED come on?
8. If you answered yes to 6 and 7, what does the pedal do when it is in the "on" position?
9. Battery or adapter (if battery, is it good? If adapter, what type?)

Also, please only post photos that are in focus.


## **Copyrights:**

All material in this document is copyrighted 2015 by BYOC, Inc.

# **Full Circle Bass Fuzz Kit Instruction Index**

<b>Parts Checklist.....</b>	<b>page 5</b>
<b>Populating the Circuit Board.....</b>	<b>page 7</b>
<b>Main PCB Assembly.....</b>	<b>page 15</b>
<b>Wiring.....</b>	<b>page 21</b>
<b>Orienting The Transistor/Finishing up.....</b>	<b>page 23</b>
<b>Operation Overview.....</b>	<b>page 24</b>
<b>Schematic.....</b>	<b>page 25</b>
<b>PCB Back Trace Photo.....</b>	<b>page 27</b>

**This is what your kit should look like when it's complete. Your kit may come with different color capacitors, switches etc. Don't be alarmed by this. They all still do the exact same thing.**

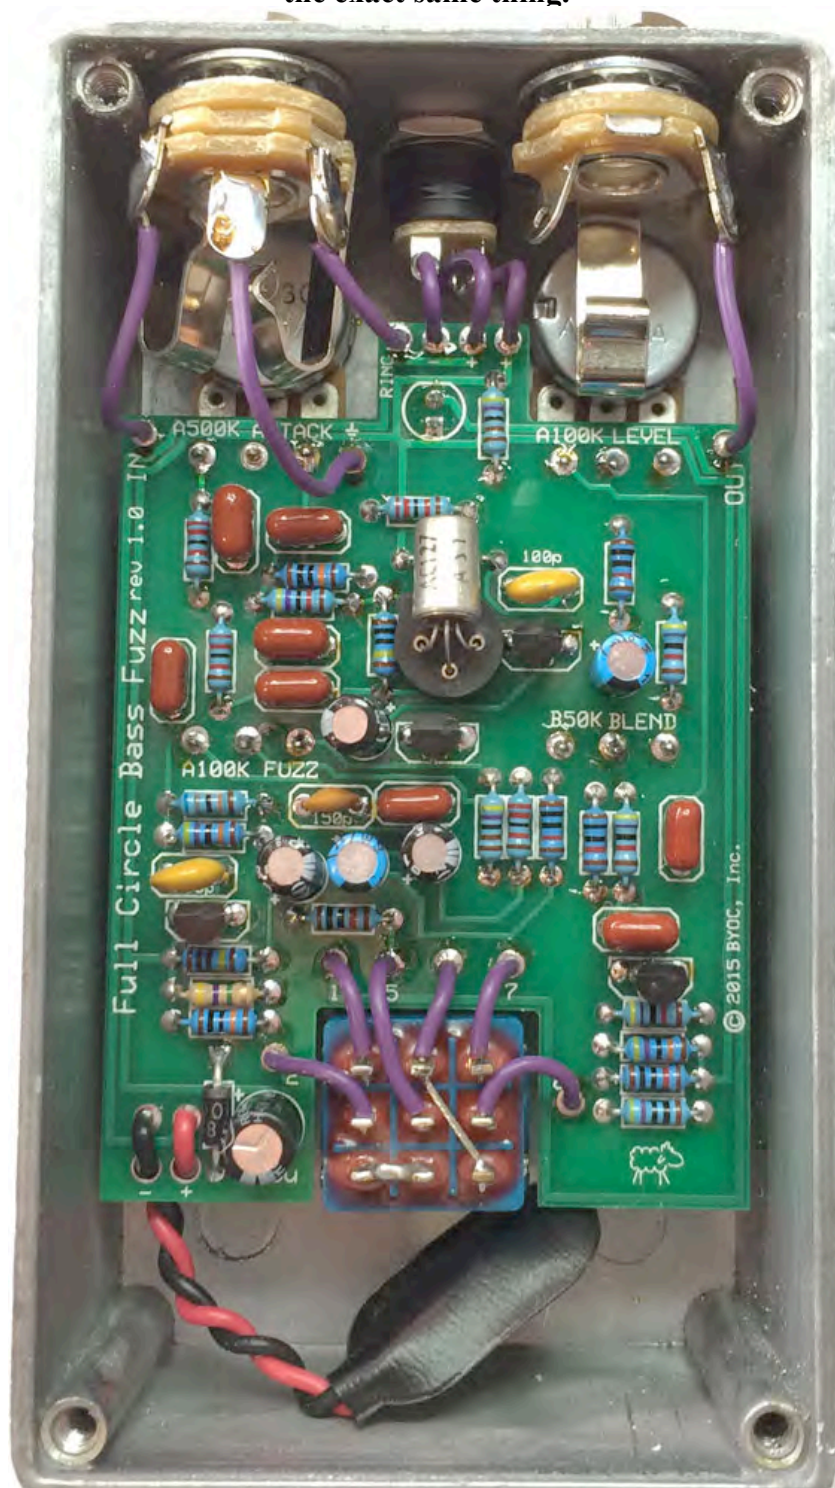

## Parts Checklist for the Full Circle Bass Fuzz Kit

Resistors:	Metal Film (5-band)	/	Carbon (4-band)
1 - 470R	(Yellow/Purple/Black/Black/Brown)	/	(Yellow/Purple/Brown/Gold)
2 - 4k7	(Yellow/Purple/Black/Brown/Brown)	/	(Yellow/Purple/Red/Gold)
4 - 10k	(Brown/Black/Black/Red/Brown)	/	(Brown/Black/Yellow/Gold)
5 - 22k	(Red/Red/Black/Red/Brown)	/	(Red/Red/Yellow/Gold)
2 - 33k	(Orange/Orange/Brown/Red/Brown)	/	(Orange/Orange/Orange/Gold)
4 - 47k	(Yellow/Purple/Black/Red/Brown)	/	(Yellow/Purple/Orange/Gold)
2 - 100k	(Brown/Black/Black/Orange/Brown)	/	(Brown/Black/Yellow/Gold)
2 - 470k	(Yellow/Purple/Black/Orange/Brown)	/	(Yellow/Purple/Yellow/Gold)
1 - 680k	(Blue/Gray/Black/Orange/Brown)	/	(Blue/Gray/Yellow/Gold)
3 - 1M	(Brown/Black/Black/Yellow/Brown)	/	(Brown/Black/Green/Gold)

Visit [www.byocelectronics.com/resistorcodes.pdf](http://www.byocelectronics.com/resistorcodes.pdf) for more information on how to differentiate resistors.

### Capacitors:

- 2 - 100p Ceramic Disc
- 1 - 150p Ceramic Disc
- 1 - 1n0/ .001uF film cap (may say "102" on the body)
- 1 - 2n7/ .0027uF film cap (may say "272" on the body)
- 4 - 100n/ .1uF film cap (may say "104" or "u1" on the body)
- 2 - 220n/ .22uF film cap (may say "224" on the body)
- 3 - 1uf Aluminum Electrolytic
- 2 - 10uf Aluminum Electrolytic
- 1 - 100uf Aluminum Electrolytic

Visit [www.byocelectronics.com/capcodes.pdf](http://www.byocelectronics.com/capcodes.pdf) for more info on how to differentiate capacitors.


### Diodes:

- 1 - 1N4001

### Transistor:

- 4 - 2N3904, 2N5088, 2N2222 or other similar transistor with EBC pinout.
- 1 - AC127 or similar NPN Germanium transistor

**Potentiometers: SNAP THE SMALL TABS ON THE TOP OF THE POTS OFF WITH A PAIR OF NEEDLE NOSE PLIERS**

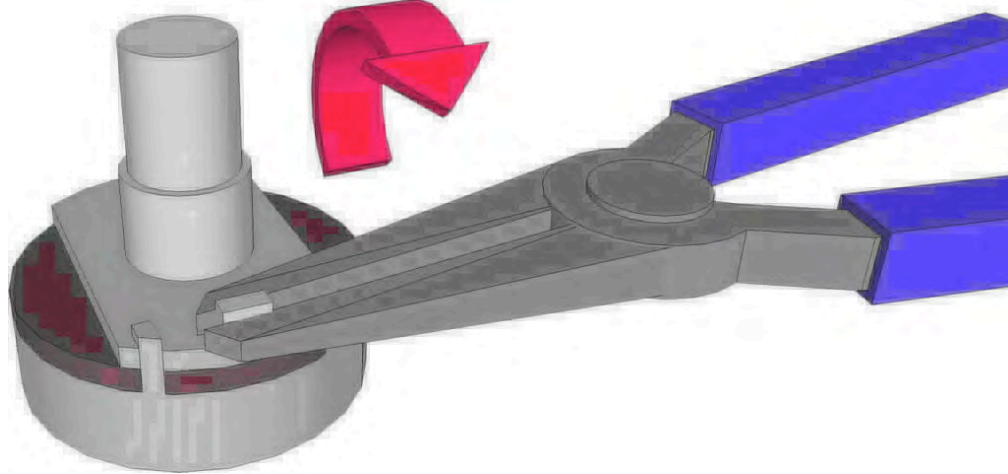

- 2 - A100k (Level and Fuzz)
- 1 - B50k (Blend)
- 1 - A500K (Attack)


**Hardware:**

- 1 - predrilled enclosure w/ 4 screws
- 1 - Full Circle Bass Fuzz circuit board
- 1 - 3pdt footswitch
- 1 - LED
- 1 - AC Jack
- 1 - 1/4" stereo jack
- 1 - 1/4" mono jack
- 1 - battery snap
- 4 - rubber bumpers
- 2 - lock washers (for in and out jacks)
- hook-up wire



## Populating the Circuit Board

**Step 1:** Add all the resistors. Resistors are not polarized and can be inserted in either direction. **NOTE: Leave the 4M7 resistor spot highlighted in yellow empty.**

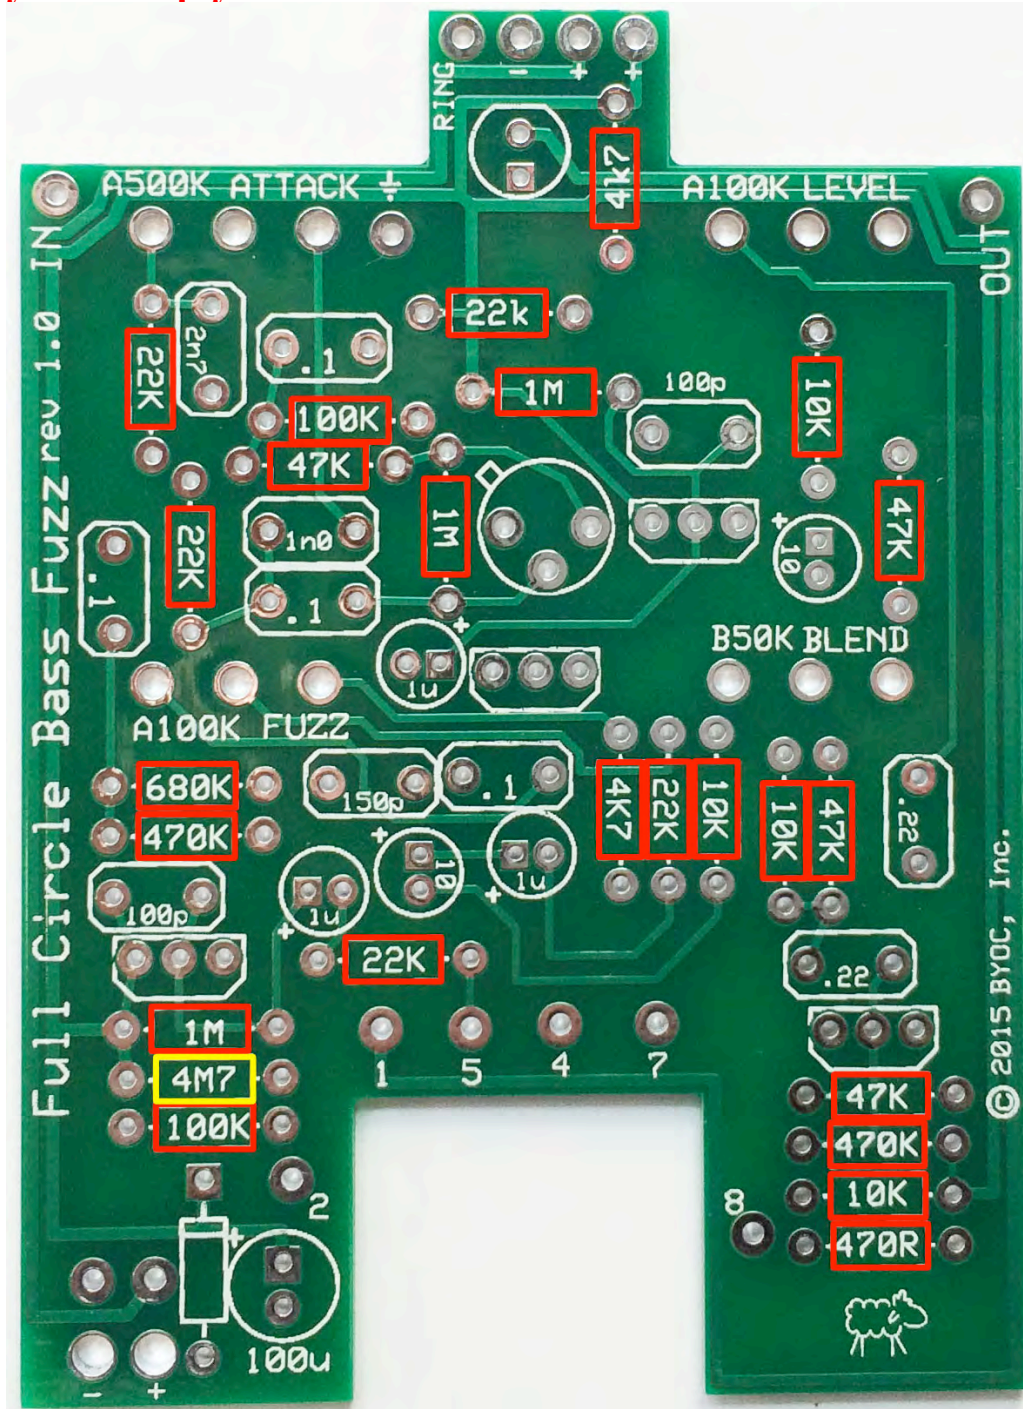

Full Circle Bass Fuzz rev 1.0 IN

A500K ATTACK

A100K LEVEL

OUT

A100K FUZZ

B50K BLEND

1 5 4 7 8

100u

© 2015 BYOC, Inc.



Full Circle Bass Fuzz rev 1.0 IN

A500K ATTACK

A100K LEVEL

OUT

22k

1M

100p

10K

47K

B50K BLEND

A100K FUZZ

680K

470K

100p

1M

4M7

100K

150p

.1

4K7

22K

10K

47K

470K

10K

470R

100u

1


5


4

7

8

© 2015 BYOC, Inc.

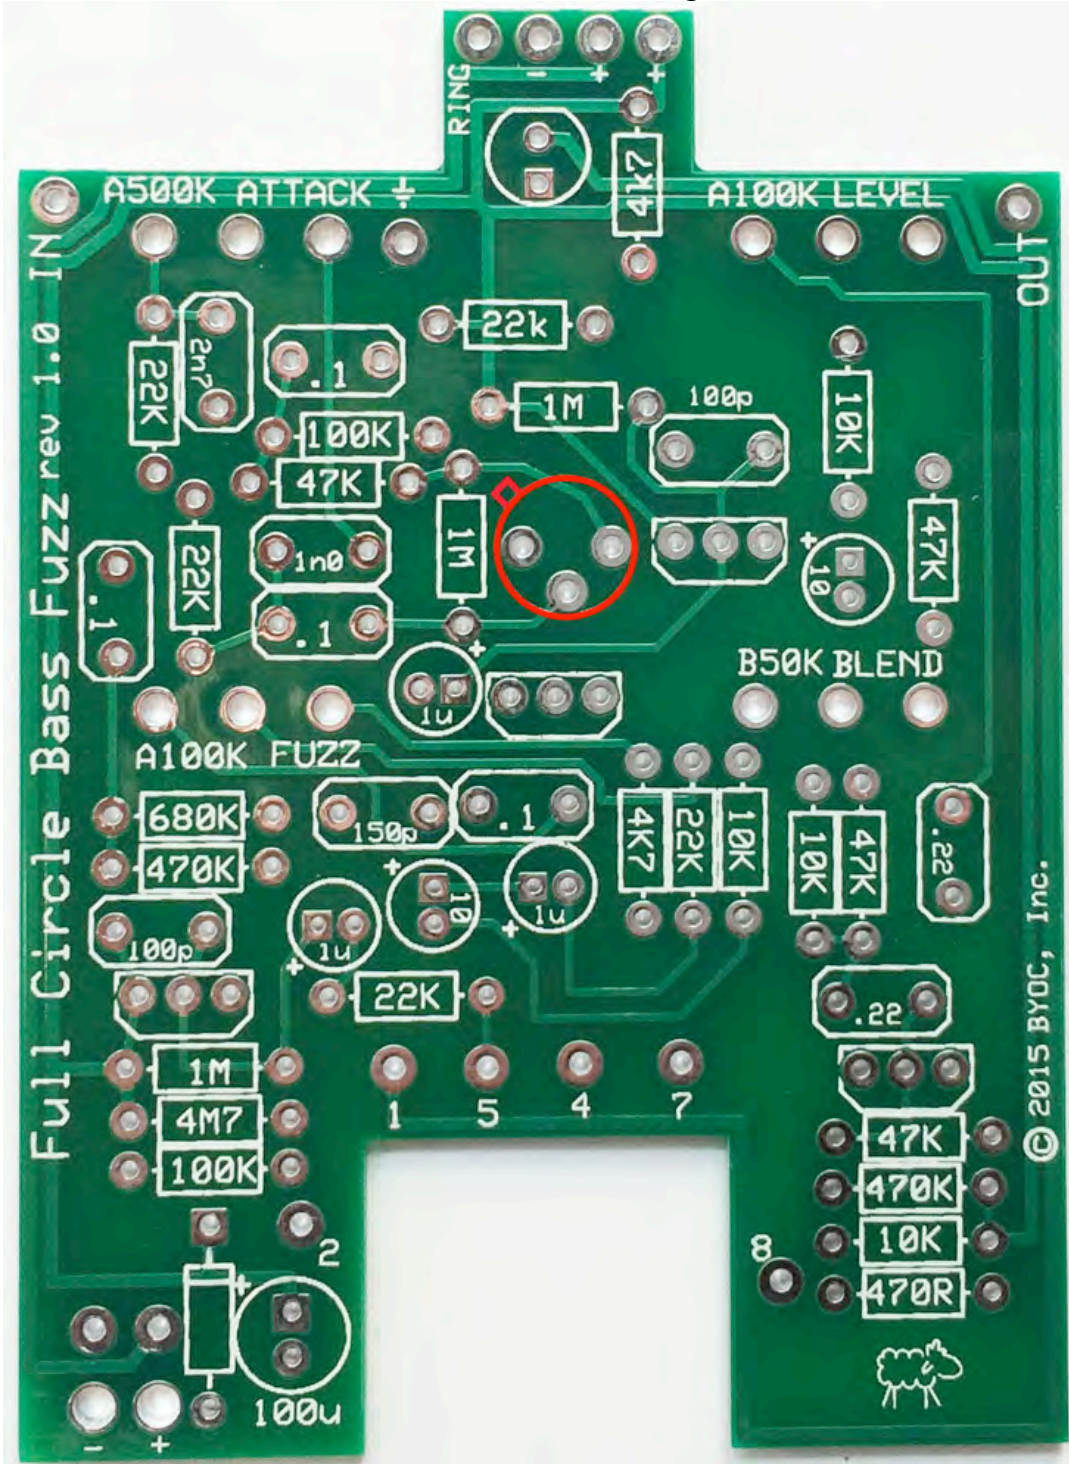


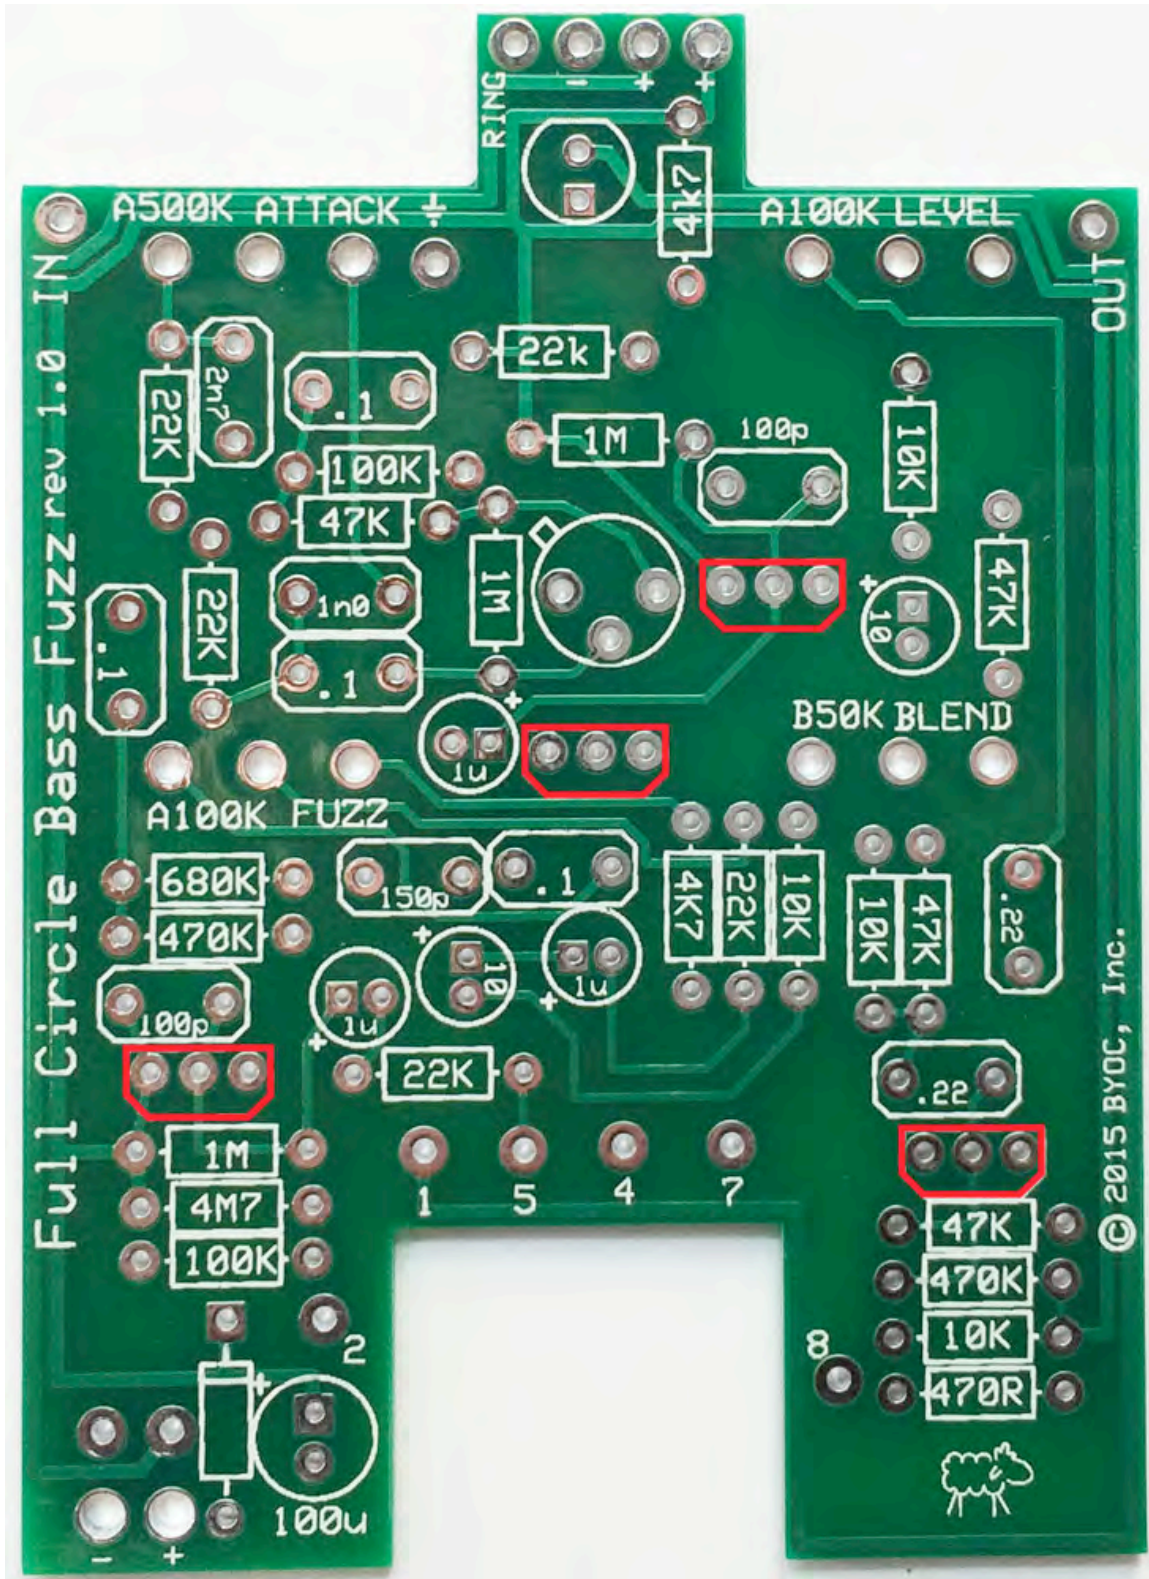





**Step 6:** Add the aluminum electrolytic capacitors. These ARE polarized, meaning there is a positive and negative end. The positive side will have a longer lead and goes in the square solder pad. The negative side will have a shorter lead and a stripe running along the body of the cap, and goes in the round solder pad.

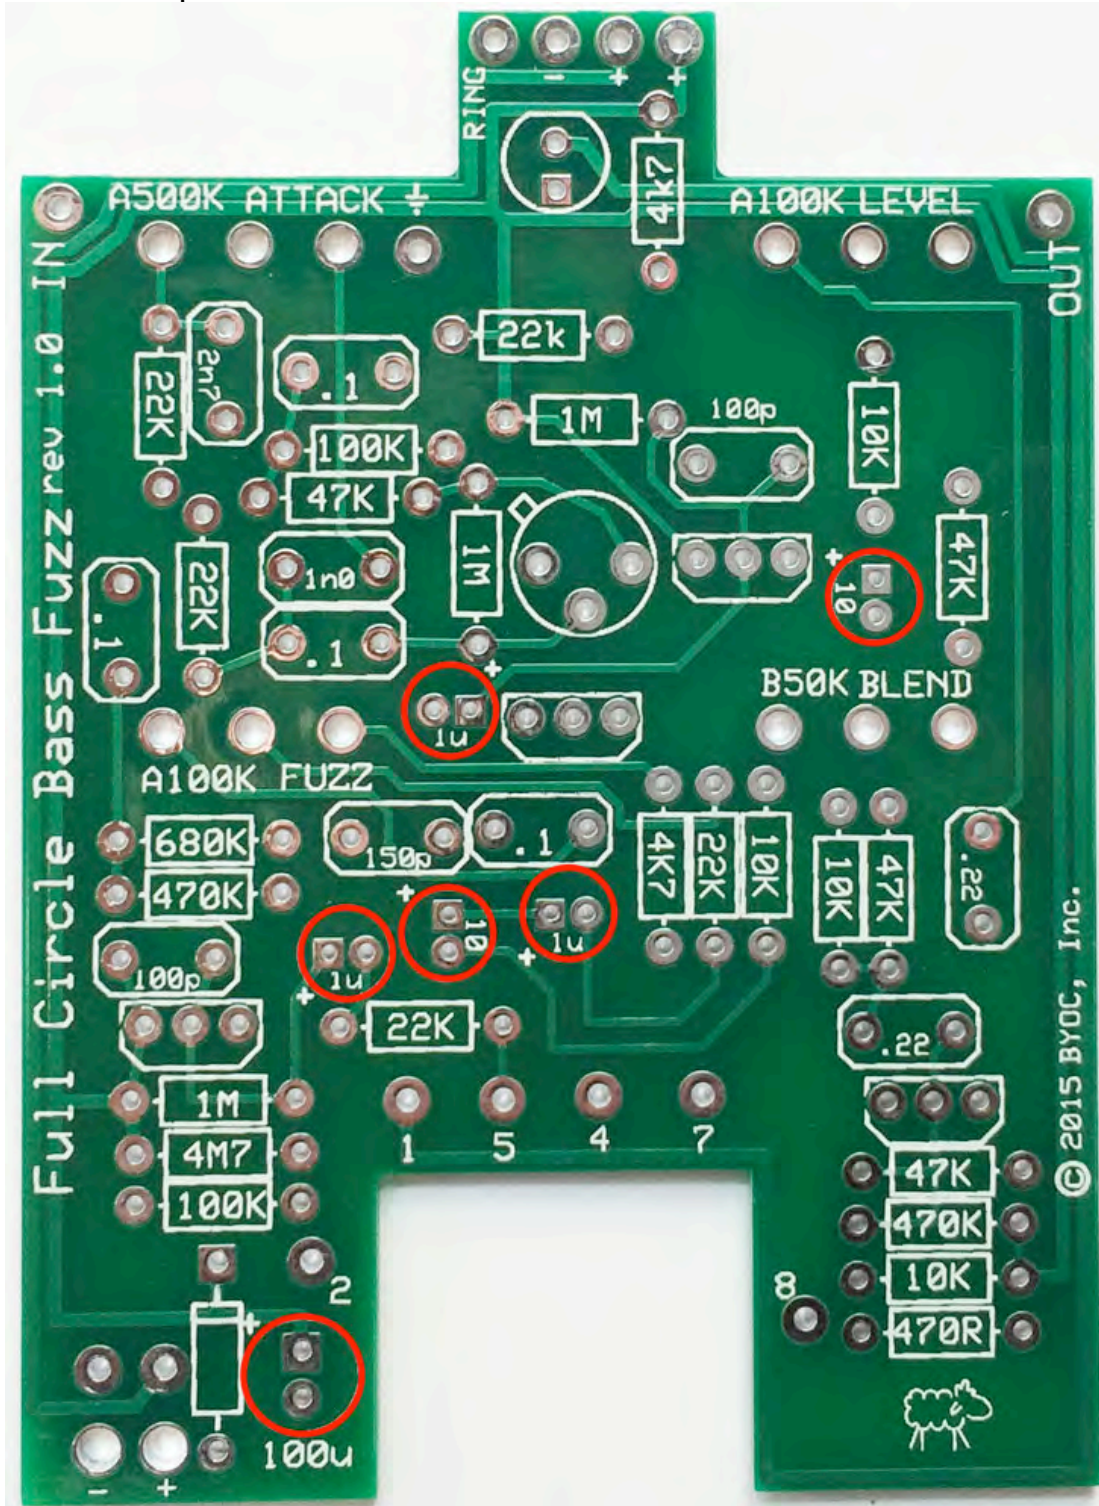



Full Circle Bass Fuzz rev 1.0 IN

A500K ATTACK +

RING

A100K LEVEL

OUT

22k

1M

100p

10K

47K

B50K BLEND

A100K FUZZ

680K

470K

100p

1M

4M7

100K

150p

.1

4K7

22K

10K

47K

.22

1

5

4

7

2

100u

8


47K


470K

10K

470R


© 2015 BYOC, Inc.

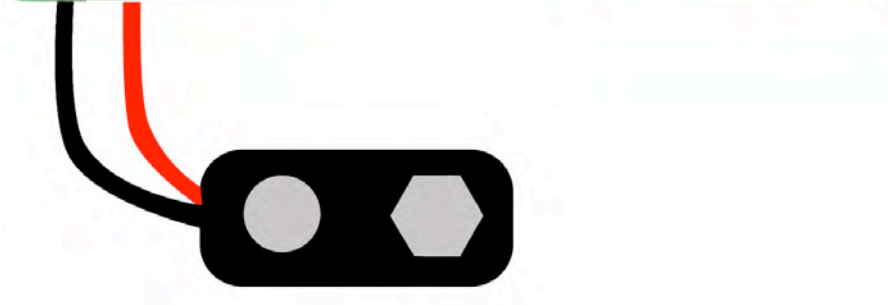

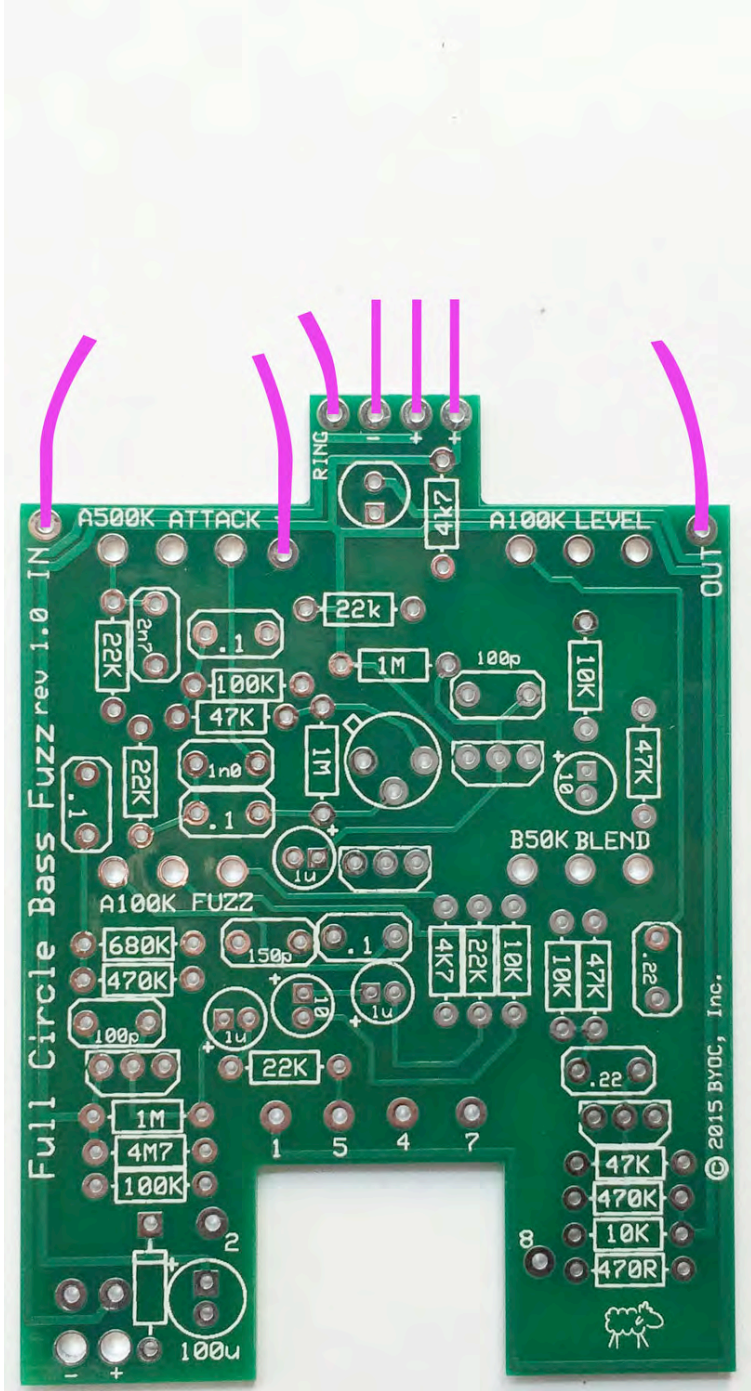


# Main PCB Assembly

**Step 1:** Mount the DC adapter jack to the enclosure. Your kit may come with either an external thread or internal thread. Don't get confused by this. They still function exactly the same. You just thread the external nut on the outside and the internal nut on the inside. The picture below is of an internal nut jack.

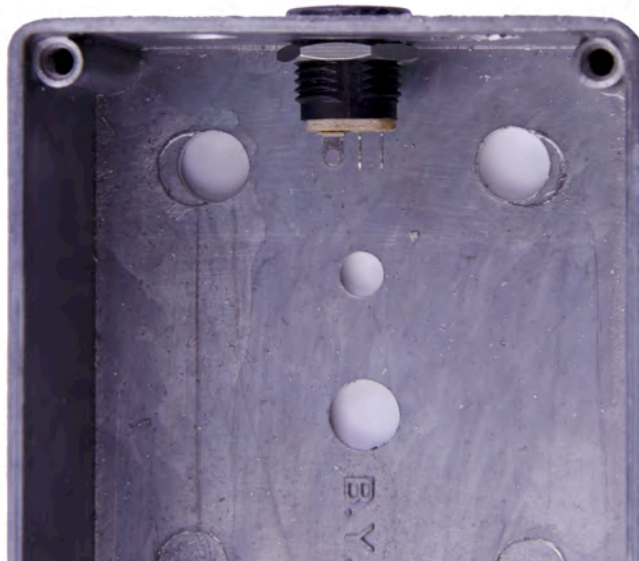




**Step 2:** Flip the PCB over so that the bottom or solder side is up. Insert the three potentiometers, and the LED into the bottom side of the PCB. **DO NOT SOLDER ANYTHING YET!!!** The LED will have one lead that is longer than the other. **THIS WILL GO INTO THE SQUARE SOLDER HOLE.** Don't forget to remove the nuts and washers from the pots and also to snap off the tabs before you do this step.

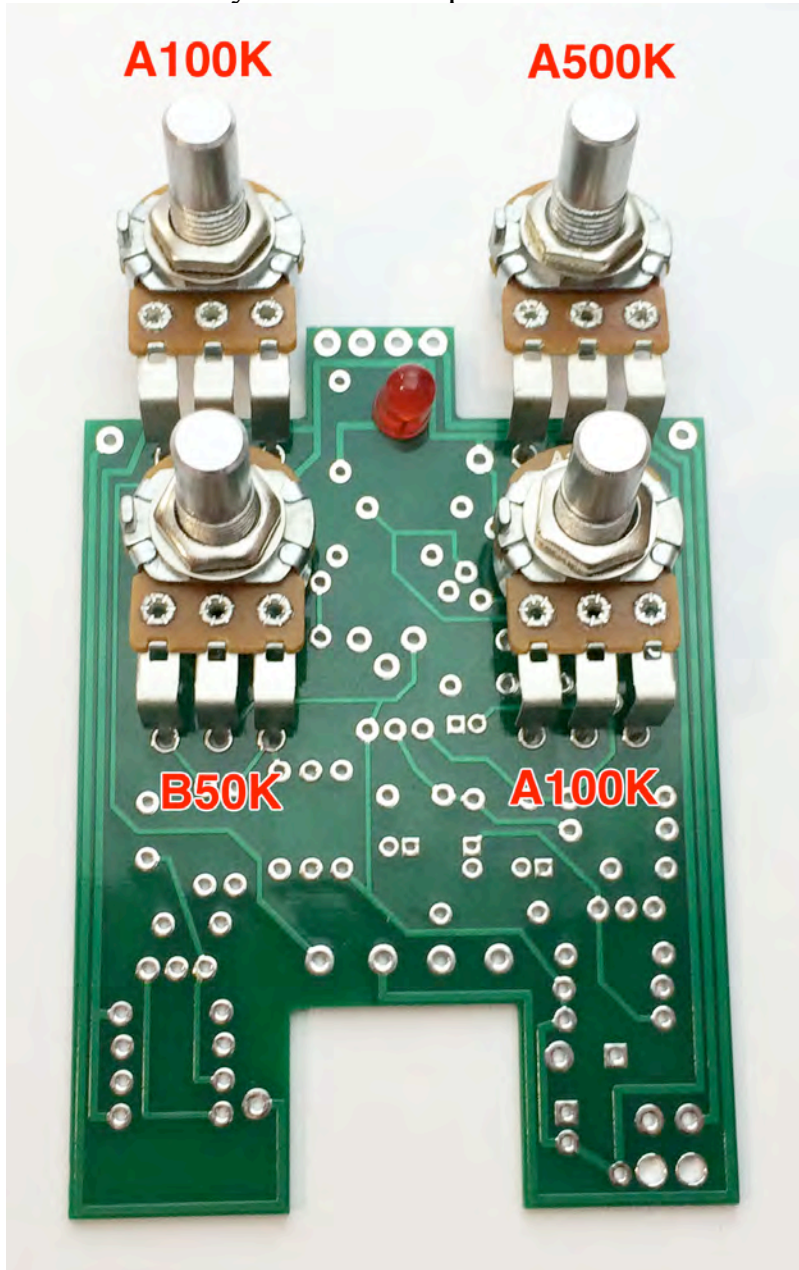



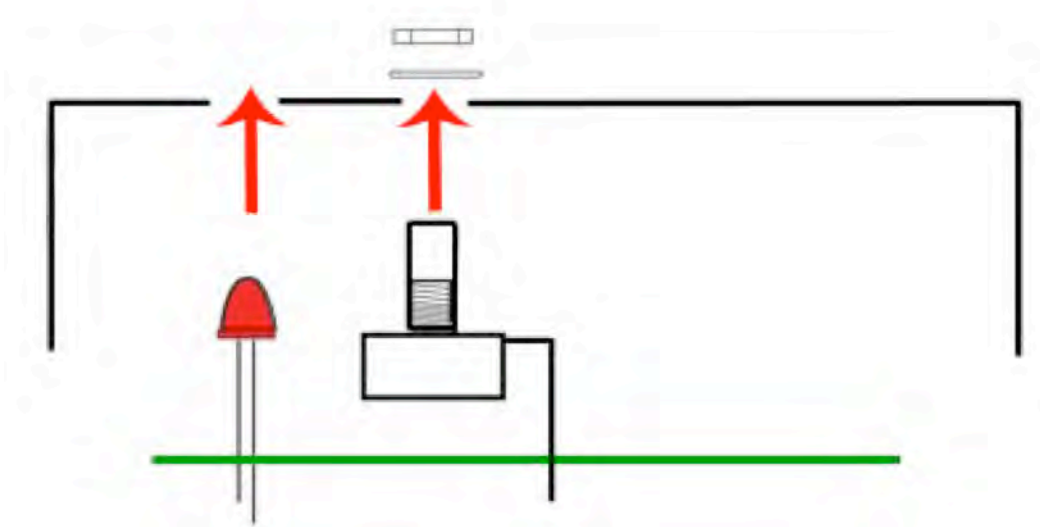

**Step 3:** Hold the PCB in one hand so that the component side of the PCB is in the palm of your hand and the bottom side with the pots and LED are facing up. Now use your other hand to guide the predrilled enclosure onto the PCB assembly so that the pots and LED all go into their respective holes. Once the PCB assembly is in place, secure it by screwing on the washers and nuts for the pots. Only tighten them with your fingers. **You do not want them very tight yet.** Make sure you've removed the nuts and washers from the pots and that you've also snapped the tabs off the pots as well before installing.

**Step 4:** Turn the entire pedal over so that the component side of the PCB is facing up. Lift the PCB up off the pots about 2mm just to make sure that the back of the PCB does not short out against the pots. Make sure the PCB is level and symmetrically seated inside the enclosure.

**Step 5:** Solder the pots and LED. You will solder these parts on the component side of the PCB. After you have soldered them in place, be sure to tighten up their nuts. Be careful not to burn any of the components on the PCB. If you do, it won't harm anything, but it will look ugly.


## Stereo (Input) Jack



## Mono (Output) Jack





**Step 6:** Install the 1/4" jacks to the enclosure.

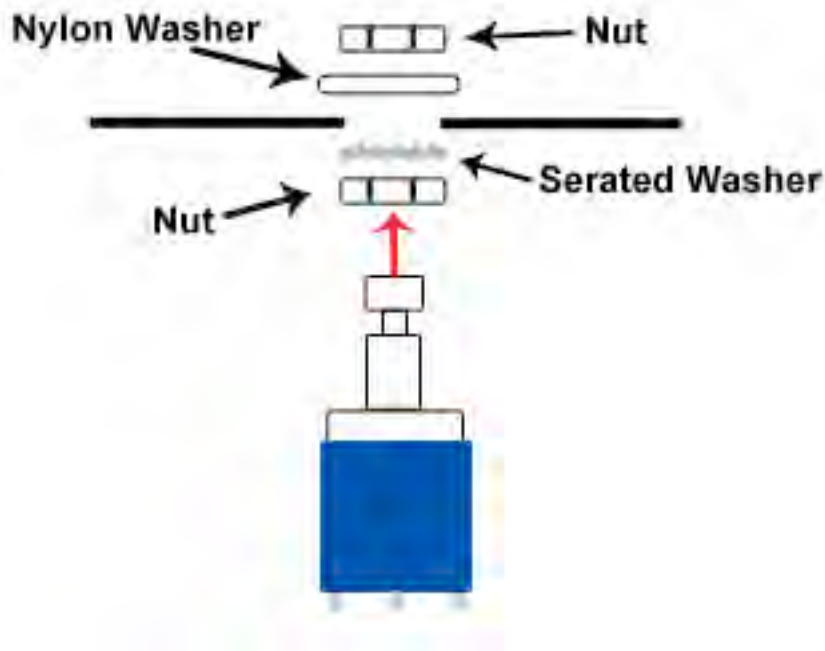


**Step 7:** Install the footswitch. Orient the footswitch so that the flat sides of the solder lugs are like the diagram below.

**NOTE:** There are no actual number markings on the footswitch. There are two correct ways you can orient the footswitch. They are both 180 degrees of each other. Either way is fine. It does not matter as long as the flat sides of the solder lugs are running horizontal, not vertical.


## FOOT SWITCH SOLDER LUG DESIGNATIONS

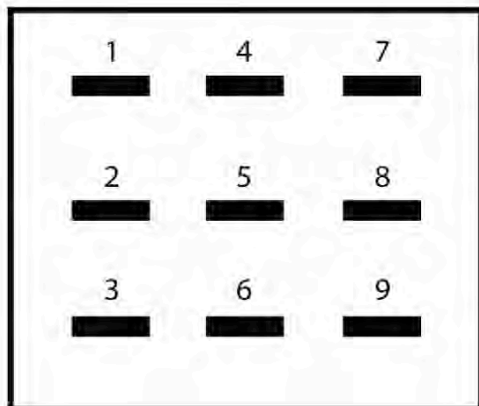

**Step 7a:** Make a jumper between lugs 3 & 6 from clippings from the resistors. Simply use your needle nose pliers to make a U shape & insert into lugs 3 & 6, then solder.

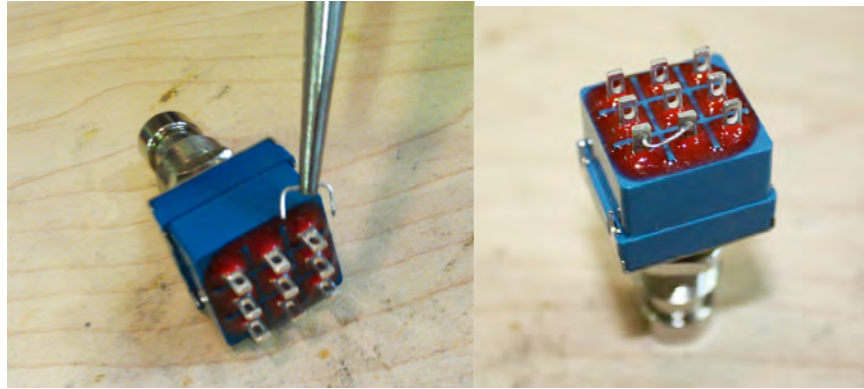


**Step 7b:** Connect a wire to LUG 4 that also jumpers to LUG9. Strip about 1" off one end. Make sure there is enough insulated wire to make the connection to the TIP of the in jack. Carefully tin the stripped end. You may want to twist the wire strands together tightly before tinning. Thread the stripped end through LUGs 4 and 9. This can be a little tricky. If this part is too frustrating for you, you can just run a separate wire to connect LUGs 4 and 9. Just be sure to solder the two wires at LUG 4 at the same time so you only need to make one solder joint.

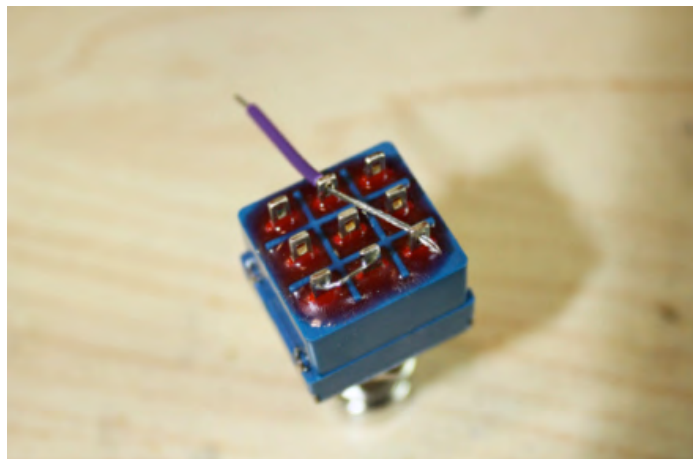





# Wiring

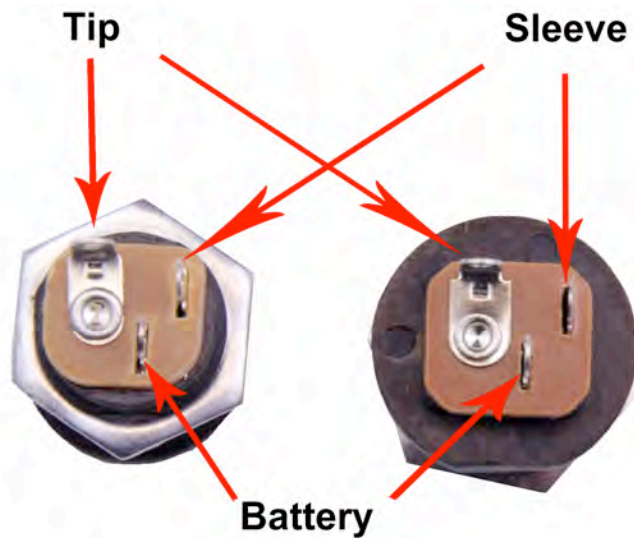


**Step 1:** Connect the TIP (negative) terminal of the DC adapter jack to the eyelet on the PCB labeled “-“. Connect the SLEEVE of the DC adapter jack to the eyelet on the PCB labeled “+” farthest to the right. Connect the battery disconnect terminal of the DC adapter jack to the second eyelet on the PCB labeled “+” located in the middle of the other two eyelets .

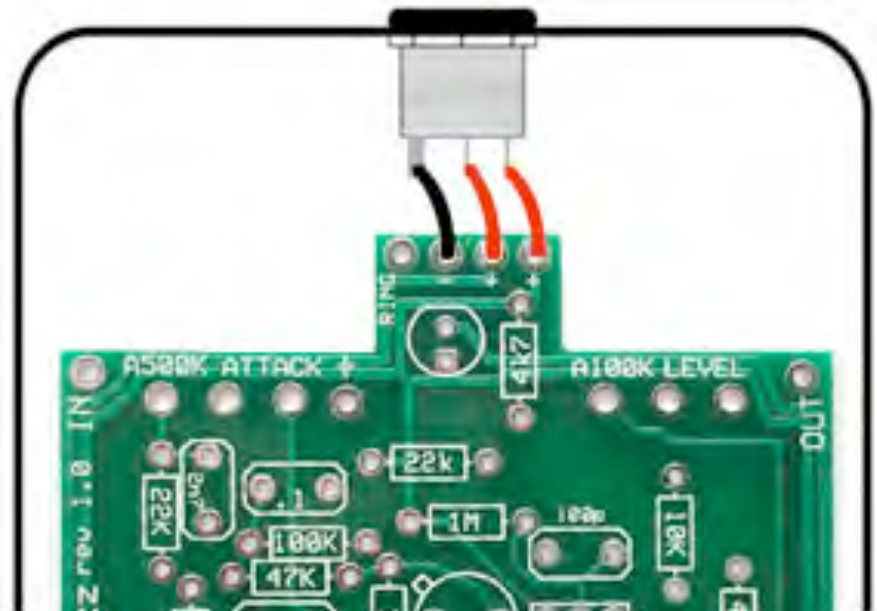

**Step 2:** Wire the PCB to the foot switch and jacks as shown.

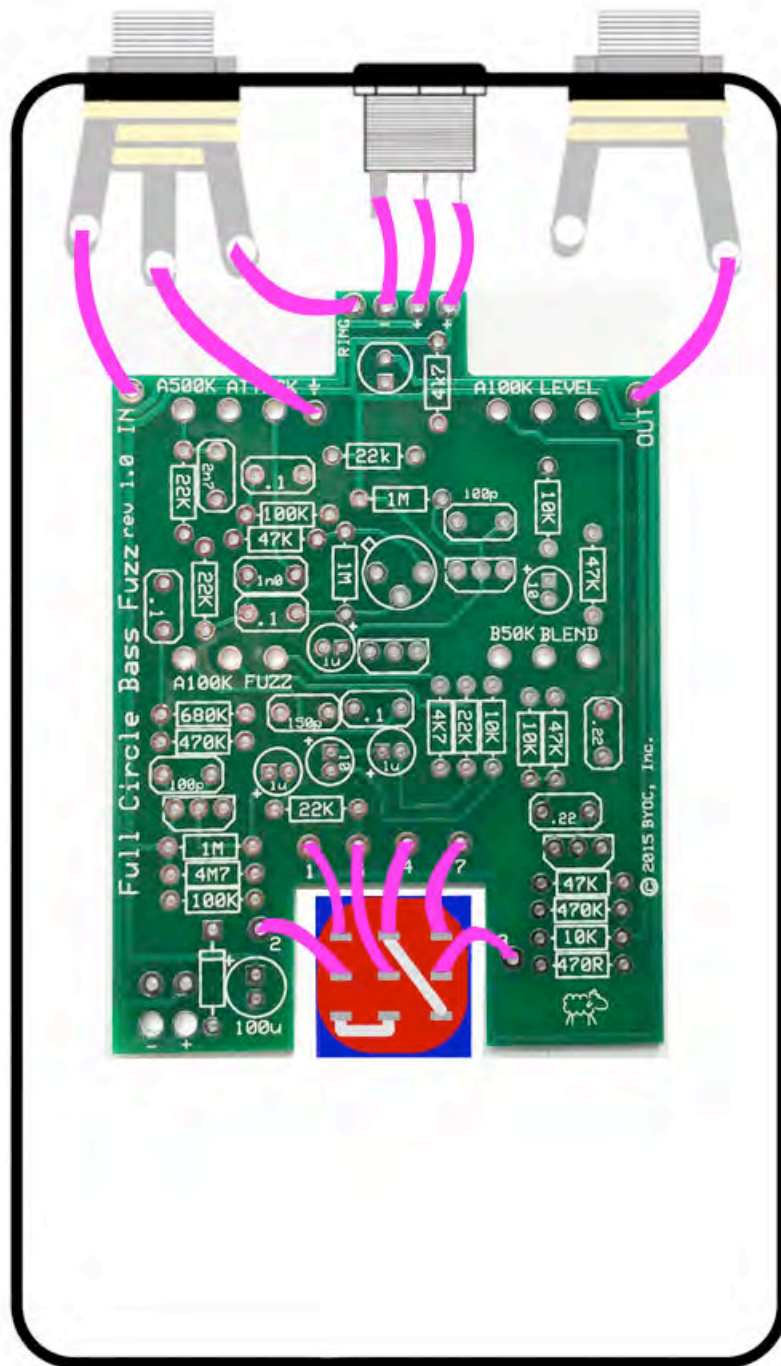


## Orienting The Transistor

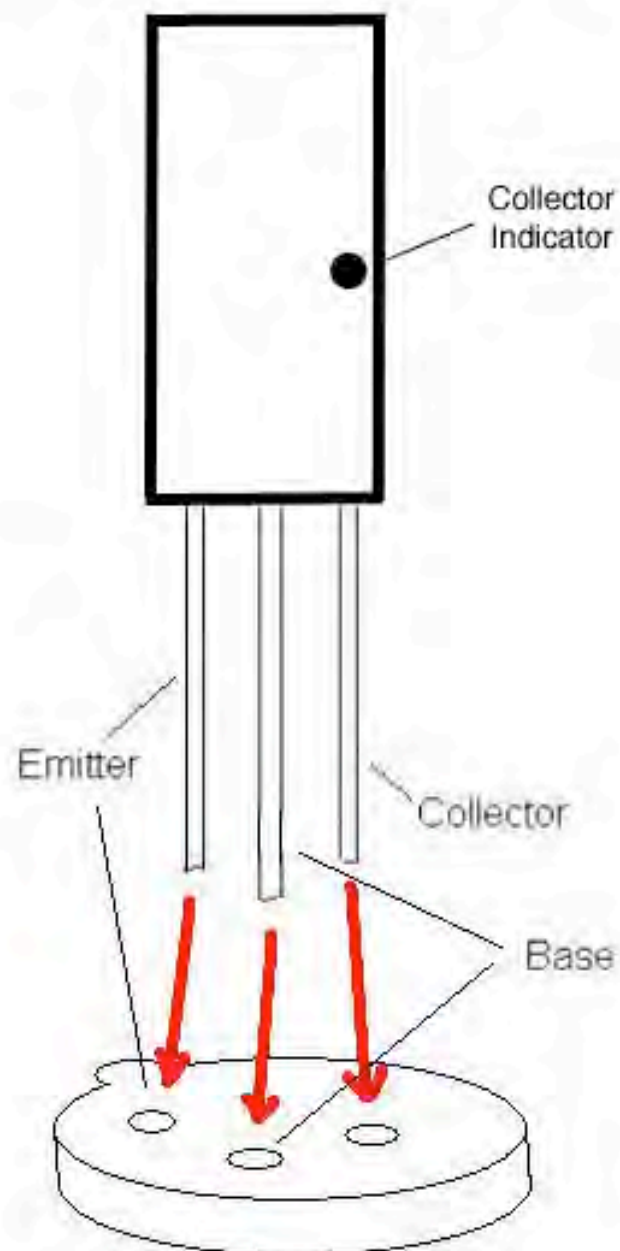



# Operating Overview

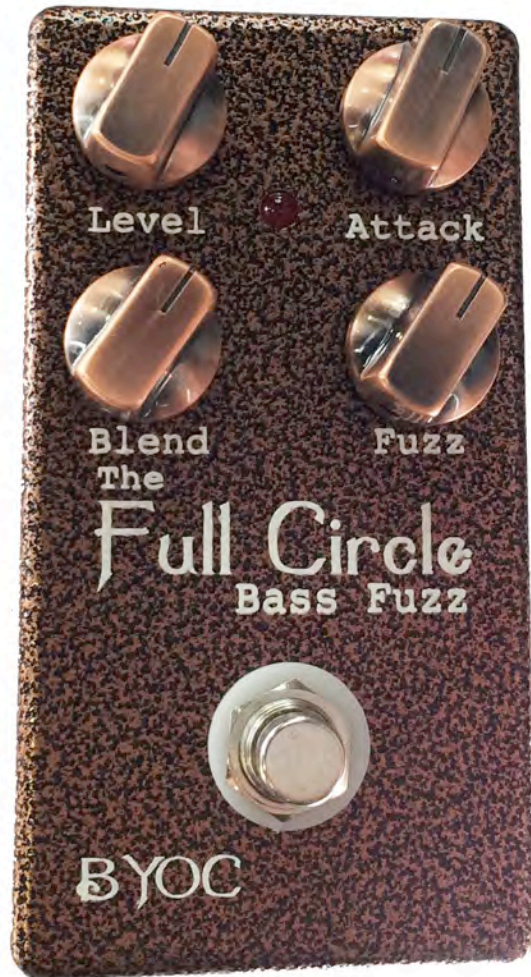

**Attack:** Sweeps between the outputs of Q2 and Q3 into Q4 to control how 'gritty' the fuzz is. Full turn clock-wise would be the Germanium transistor (Q3) and full turn counter clock-wise would be the Silicon transistor (Q2).

**Level:** Controls the overall output volume.

**Fuzz:** Controls how much signal passes between Q1 and Q2, counter clock-wise gives less signal, therefore less fuzz, clock-wise gives more signal, therefore more fuzz.


**Blend:** Blends between the clean signal, and fuzz. Full turn Counter clock-wise is clean signal, full turn clock-wise is the full fuzz signal.

**Power supply:** 9V battery or 2.1mm negative tip.

**Current Draw:** 7.5mA

**Input Impedance:** 4.7K ohms

**Output Impedance:** 100k ohms

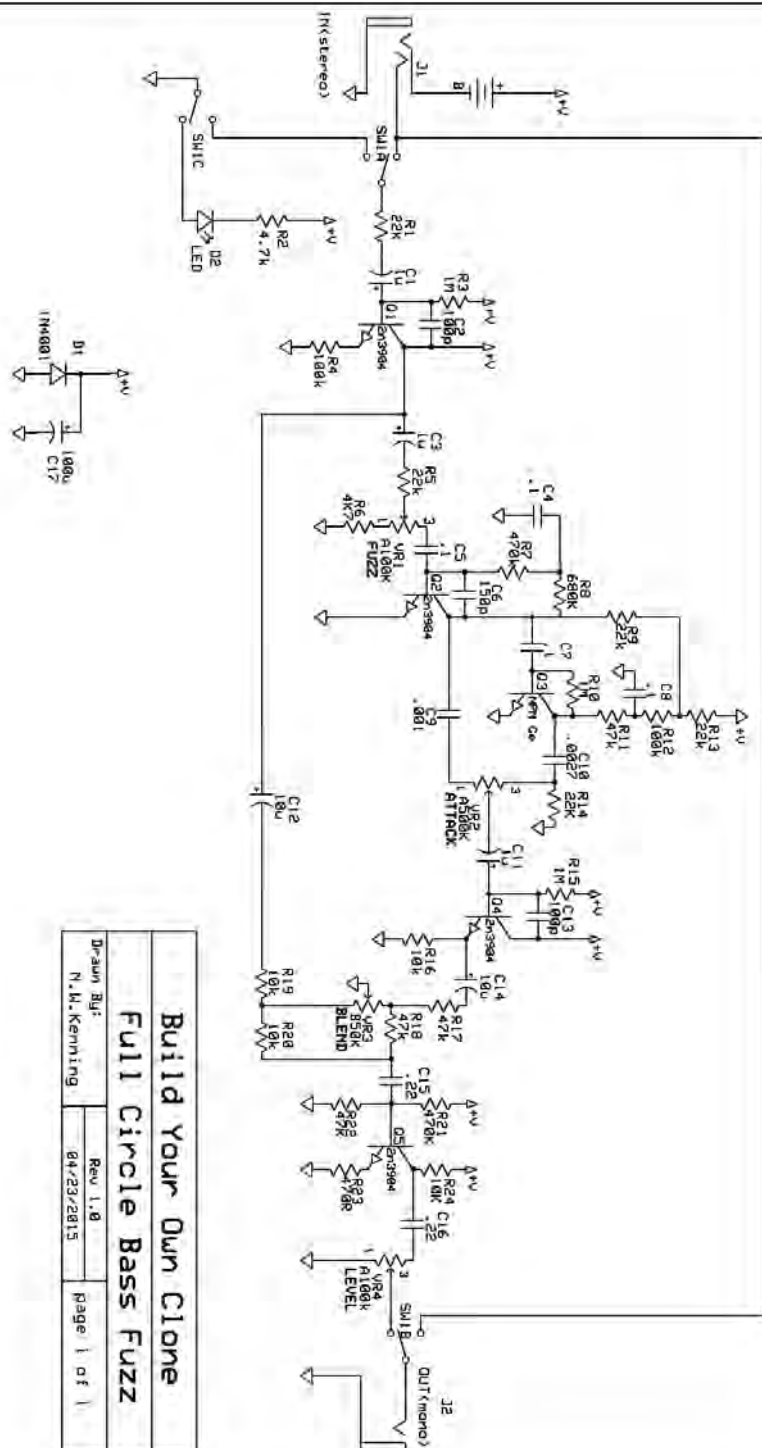

For hi-res schematic visit <http://www.byocelctronics.com/fullcircleschematic.pdf>

Please visit  
<http://byoceletronics.com/board>  
for any technical support

Copyright 2015  
BYOC, Inc.



**PCB Back Trace Photo**

